




CONVEYOR TRASPORTATORE



Detail: safety cover
Particolare: coperchio di sicurezza




Option: unloading chute
Alternativa: scivolo allo scarico



Detail: supporting wheel
Particolare: ruota di appoggio



Belt RAL 7030.
Tappeto RAL 7030.

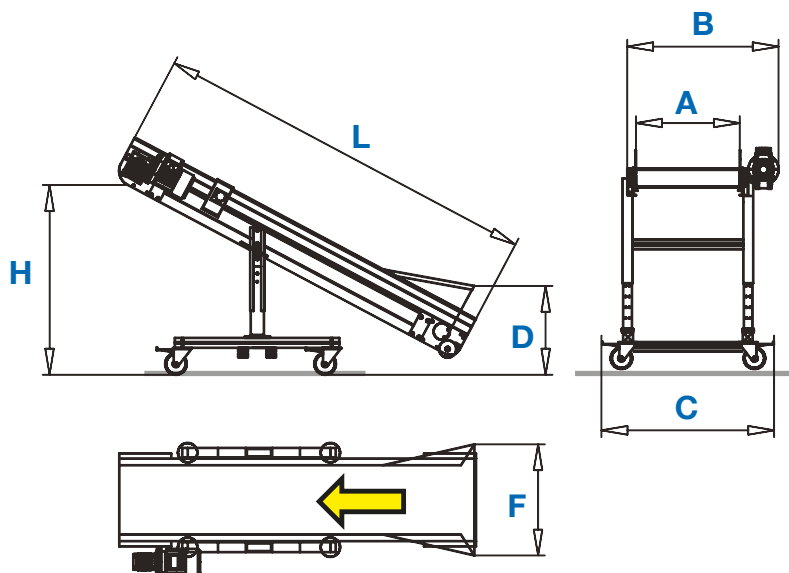

mod:	FV									
A (mm)	200	280	350	380	480	580	680	830	1030	1180
B (mm)	440	520	590	620	720	820	940	1090	1290	1440
C (mm)	445	525	595	625	725	825	945	1095	1295	1445
L (mm)	min 860 - max on request / a richiesta									
H_{min} (mm)	on request / a richiesta									
H_{max} (mm)	on request / a richiesta									
F (mm)	295	375	445	455	575	675	775	925	1125	1275
D (mm)	min 300 - max on request / a richiesta									
V (m/min)	3 m/min									
P (kW)	0.18 kW									
Supply Voltage/ Alimentazione	400-415 V ; 3 ph ; 50-60 Hz									

Plastic Modules
Moduli plastici



Aluminium
Alluminio



Light Model: thickness 50 mm.
Versione light: spessore nastro 50 mm.



Iron and stainless steel version
Versione disponibile anche in ferro
e acciaio inox



Available accessories Accessori disponibili							Pagg. 50-53
--	--	--	--	--	--	--	----------------