

CONVEYOR TRASPORTATORE



Alternative: Cage in metal net
Alternativa: Tamponatura in rete metallica




Option: tool tray
Alternativa: vassoio porta utensili



Option: protection roof
Alternativa: tettoia di protezione

Belt RAL 7030.
Tappeto RAL 7030.

PA ROBOT

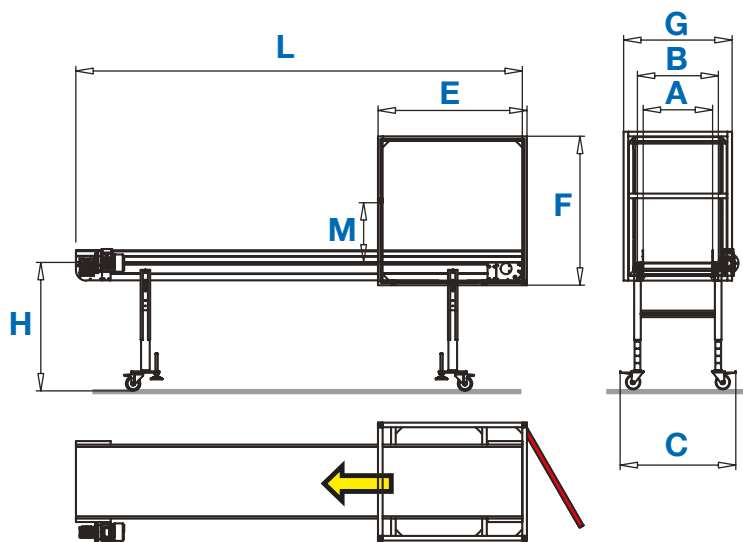


mod:	PA ROBOT									
A (mm)	200	280	350	380	480	580	680	830	1030	1180
B (mm)	440	520	590	620	720	820	940	1090	1290	1440
C (mm)	445	525	595	625	725	825	945	1095	1295	1445
L (mm)	min 860 - max on request / a richiesta									
H (mm)	800-1100 ; 1000-1500									
G (mm)	470	550	620	650	750	850	950	1100	1300	1450
E , F (mm)	1030; 870									
M (mm)	300						500			
V (mt/min)	3 mt/min						4 mt/min			
P (kW)	0.18 kW					0.37 kW				
Supply voltage/ Alimentazione	400-415 V ; 3 ph ; 50-60 Hz									

Available accessories Accessori disponibili							Pagg. 50-53
--	---	---	---	---	---	---	----------------

Plastic Modules
Moduli plastici



Aluminium
Alluminio



Light Model: thickness 50 mm.
Versione light: spessore nastro 50 mm.



Iron and stainless steel version
Versione disponibile anche in ferro
e acciaio inox

