


CONVEYOR TRASPORTATORE




Option: Motor placed under conveyor
Alternativa: Motore sotto nastro con rinvio a catena



Detail: standard flat leg
Particolare: gamba flat standard

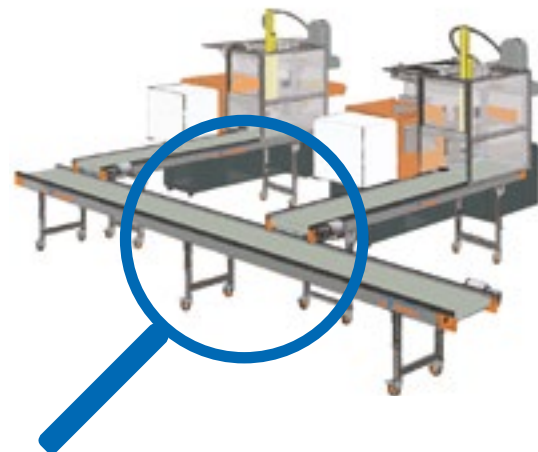

Belt RAL 7030.
Tappeto RAL 7030.

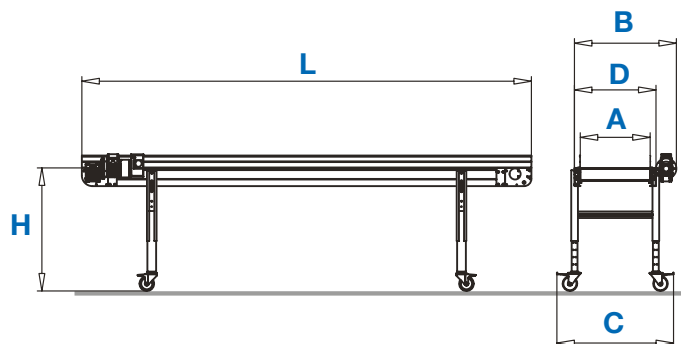

mod:	PA									
A (mm)	200	280	350	380	480	580	680	830	1030	1180
B (mm)	440	520	590	620	720	820	940	1090	1290	1440
C (mm)	445	525	595	625	725	825	945	1095	1295	1445
D (mm)	280	360	430	460	560	660	760	910	1110	1260
L (mm)	min 860 - max on request / a richiesta									
H (mm)	450-600 ; 600-800 ; 800-1100 ; 1000-1500									
V (m/min)	3 m/min						4 m/min			
P (kW)	0.18 kW					0.37 kW				
Supply voltage/ Alimentazione	400-415 V ; 3 ph ; 50-60 Hz									

Plastic Modules
Moduli plastici



Aluminium
Alluminio



Light Model: thickness 50 mm.
Versione light: spessore nastro 50 mm.



Iron and stainless steel version
Versione disponibile anche in ferro
e acciaio inox



Available accessories Accessori disponibili							Pagg. 50-53
--	---	---	---	---	---	---	----------------